




### Features

- Rated Power 2KW-5.5KW
- Pure sine wave output
- Self-consumption and Feed-in to the grid
- Programmable supply priority for PV, Battery or Grid
- User-adjustable battery charging current suits different types of batteries
- Programmable multiple operation modes: Grid-tie, off-grid and grid-tie with backup
- Monitoring software & Wifi Kit for real-time status display and control
- Support parallel operation up to 3 units



### Introduction

PH1800 Plus series hybrid solar inverter, it can realize self-consumption and feed-in to the grid from solar energy with best solution according to your setting. During the daytime solar power can run your home appliances and if there is extra solar power it will feed-in to the grid or you can choose to save them on the battery to backup when power failure or nighttime.


### Back panel printing description

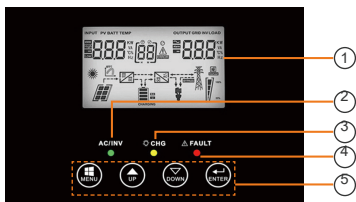

1. LCD Display
2. Status Indicator
3. Charging Indicator
4. Fault Indicator
5. Function Buttons
6. Dry contact
7. USB
8. AC Input
9. AC Output
10. PV Input
11. Power On/Off Switch
12. Battery Input
13. Circuit breaker
14. Parallel connection port
15. RS-485 Communication port
16. USB WIFI

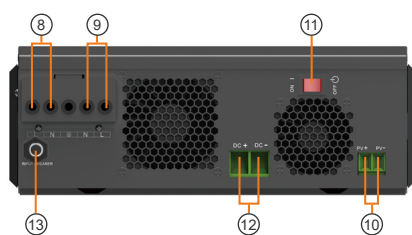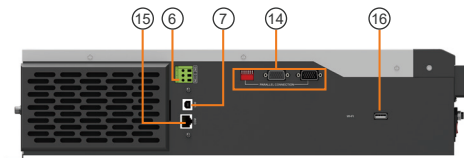


(2KW-3KW)

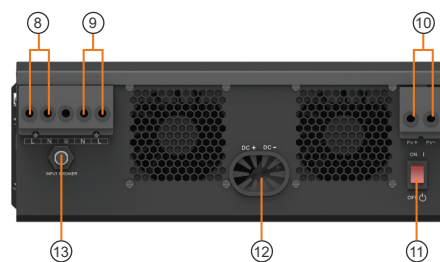

(3KW-5.5KW)

### Solar system connection

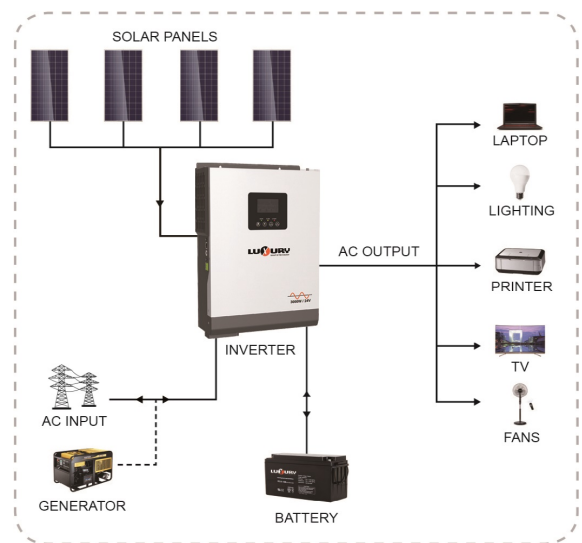

## Specification

MODEL		PH18-2024 Plus	PH18-3024 Plus	PH18-3048 Plus	PH18-4048 Plus	PH18-5048 Plus	PH18-5548 Plus
Nominal Battery System Voltage		24VDC		48VDC			
INVERTER OUTPUT	Rated Power	2000W	3000W	3000W	4000W	5000W	5500W
	Surge Power	4000W	6000W	6000W	8000W	10000W	11000W
	Waveform	Pure Sine Wave					
	AC Voltage Regulation (Batt.Mode)	220VAC~240VAC(setting)					
	Electric Current	8.7A	13A		17.4A	21.7A	23.9A
	Inverter Efficiency(Peak)	93%					
	Transfer Time	10ms(UPS \VDE4105 ) 20ms( APL)					
AC INPUT	Voltage	230VAC					
	Selectable Voltage Range	170~280VAC(UPS), 90~280VAC(APL), 184~253VAC(VDE4105)					
	Frequency Range	50Hz \ 60Hz (Auto Sensing)					
BATTERY	Normal Voltage	24VDC		48VDC			
	Floating Charge Voltage	27.4VDC		54.8VDC			
	Overcharge Protection	30VDC		60VDC			
SOLAR CHARGER & AC CHARGER	Maximum PV Array Open Circuit Voltage	145VDC					
	PV Array MPPT Voltage Range	30~130VDC		64~130VDC			
	Standby Power Consumption	2W					
	Maximum PV Array Power	2000W		4000W			
	Maximum Solar Charge Current	80A					
	Maximum Efficiency	98%					
	Maximum AC Charge Current	60A					
	Maximum Charge Current	140A					
MECHANICAL SPECIFICATIONS	Machine Dimensions (W*H*D)	272*355*100 mm		297.5*468*125mm			
	Net Weight(KG)	7.4		10			
	Package Dimensions(W*H*D)	570*405*246mm		610*405*241mm			
	Gross Weight(KG)	10		12.6			
OTHER	Humidity	5% to 95% Relative Humidity (Non-condensing)					
	Operating Temperature	0°C ~55°C					
	Storage Temperature	-15°C ~60°C					